


# C1000

## LUBRICATE 1/2" JACKSCREW THREADS BEFORE USE

MODEL C-1000

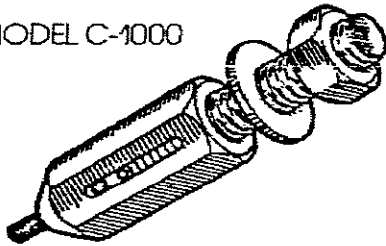


Wrench Type Plusnut Fastener Headers are available for Plusnuts with the following thread sizes:


#4-40 through 1/4"  
 Metric M4 through M6

When Ordering Tools, Always Specify Plusnut Thread Size


## OPERATING INSTRUCTIONS

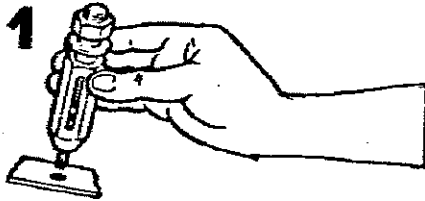

**1** TURN 1/2 NUT IN COUNTERCLOCKWISE DIRECTION UNTIL STUD IS FULLY EXTENDED. ENGAGE ALL THREADS ON THE STUD INTO THE PLUSNUT. ADVANCE NUT UNTIL FASTENER IS TIGHT AGAINST TOOL FACE. INSERT FASTENER INTO HOLE.

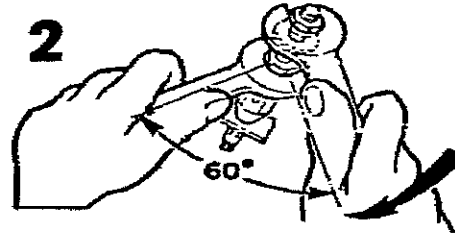

**2** PLACE 3/4" OPEN END WRENCH ON TOOL BODY AND HOLD STATIONARY USING A 3/4" WRENCH ON THE 1/2 NUT. TURN CLOCKWISE WHILE HOLDING TOOL PERPENDICULAR TO THE WORK. POWER IS BEST APPLIED THROUGH ANGLE SHOWN.

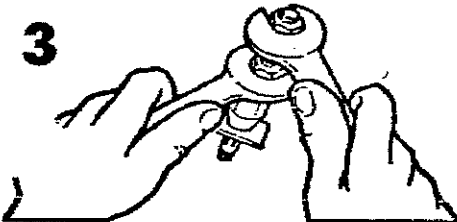

**3** TURN NUT UNTIL FIRM RESISTANCE IS FELT. SEVERAL TURNS WILL BE REQUIRED. A BOX END RATCHET WRENCH WILL SPEED UP THIS OPERATION. USE CAUTION NOT TO OVERUPSET THE FASTENER AND CAUSE THREAD DAMAGE. BREAK NUT LOOSE WITH A COUNTERCLOCKWISE MOTION.



**4** REMOVE TOOL FROM PLUSNUT BY REVOLVING TOOL BODY IN A COUNTERCLOCKWISE DIRECTION.